

PINACHO

**PROGRAMA GENERAL DE NUESTRA FABRICACION DE TORNOS
OUR GENERAL LATHE PRODUCTION PROGRAMME
NOTRE PROGRAMME GENERALE DE FABRICATION DE TOURS
UNSER ALLGEMEINES DREHBANK-FERTIGUNGSPROGRAMM**

pedro d'olivia

SOCIEDAD ANÓNIMA TARRAGONA

INGENIEROS INDUSTRIALES


C/ Urgel, 143 - 08036 BARCELONA ESPAÑA

TEL. (93) 323 78 78 (14 líneas) - FAX 2531557 - TELEX N° 50034 TARR. E



Pinacho



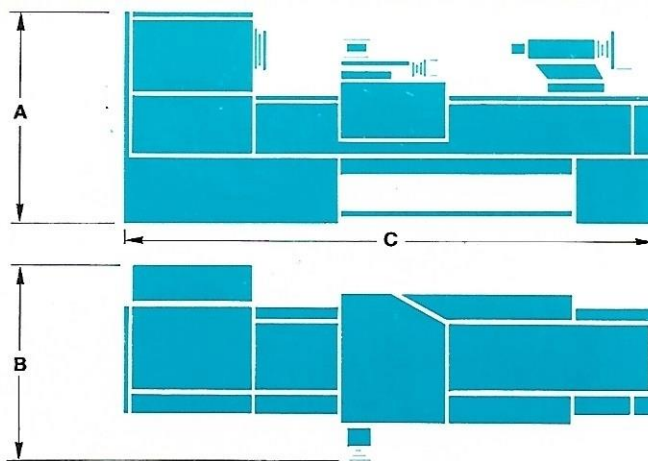

MOD.		A B C			KGS.		  			
					NETO NET NETTO	BRUTO GROSS BRUT BRUTTO	LARGO LENGTH LONGUEUR BREITE	ANCHO WIDTH LARGEUR LANGE	ALTO HEIGHT HAUTEUR HOHE	VOLUMEN m³ VOLUME m³ VOLUME m³ VOLUMEN m³
L-1/165	750	1235	820	1650	680	800	1,85	0,93	1,44	2,477
	1000	1235	820	1930	730	850	2,11	0,93	1,44	2,825
L-1/180	750	1235	820	1650	710	840	1,85	0,93	1,44	2,477
	1000	1235	820	1930	760	890	2,11	0,93	1,44	2,825
L-8/165	750	1260	820	1650	680	800	1,85	0,93	1,44	2,477
	1000	1260	820	1930	730	850	2,11	0,93	1,44	2,825
L-8/180	750	1260	820	1650	710	840	1,85	0,93	1,44	2,477
	1000	1260	820	1930	760	890	2,11	0,93	1,44	2,825
L-1/200	750	1325	850	1850	850	1030	2,08	1,02	1,55	3,29
	1150	1325	850	2215	925	1130	2,40	1,02	1,55	3,79
L-1/225	750	1370	850	1850	1000	1230	2,18	1,02	1,55	3,56
	1150	1370	850	2215	1100	1350	2,40	1,02	1,55	3,92
	1650	1370	850	2705	1250	1550	2,93	1,02	1,55	4,78
L-1/260	1150	1405	960	2290	1550	1750	2,56	1,07	1,60	4,38
	1625	1405	960	2795	1600	1950	3,01	1,07	1,60	5,75
	2225	1405	960	3415	1750	2150	3,61	1,07	1,60	6,18
	3150	1405	960	4350	2200	2600	4,55	1,07	1,60	7,79
L-1/310	1150	1455	1020	2290	1650	1850	2,56	1,07	1,65	4,52
	1625	1455	1020	2795	1700	2050	3,01	1,07	1,65	5,31
	2225	1455	1020	3415	1850	2250	3,61	1,07	1,65	6,37
	3150	1455	1020	4350	2300	2700	4,55	1,07	1,65	8,03
L-2/105	1150	1415	875	2215	1150	1420	2,40	1,02	1,63	3,99
	1625	1415	875	2705	1300	1620	2,93	1,02	1,63	4,87
L-3/155	1150	1445	975	2290	1650	1850	2,56	1,07	1,68	4,60
	1625	1445	975	2795	1700	2050	3,01	1,07	1,68	5,41
	2225	1445	975	3415	1850	2250	3,61	1,07	1,68	6,49
	3150	1445	975	4350	2300	2700	4,55	1,07	1,68	8,18
L-8/225	750	1370	850	1850	1000	1230	2,18	1,02	1,60	3,56
	1150	1370	850	2215	1100	1350	2,40	1,02	1,60	3,92
	1650	1370	850	2705	1250	1550	2,93	1,02	1,60	4,78
L-8/260	1150	1405	960	2290	1550	1750	2,56	1,07	1,60	4,38
	1625	1405	960	2795	1600	1950	3,01	1,07	1,60	5,75
	2225	1405	960	3415	1750	2150	3,61	1,07	1,60	6,18
	3150	1405	960	4350	2200	2600	4,55	1,07	1,60	7,79
L-11/260	1150	1460	960	2300	1550	1750	2,76	1,07	1,60	4,72
	1625	1460	960	2795	1600	1950	3,21	1,07	1,60	5,49
	2225	1460	960	3415	1750	2150	3,81	1,07	1,60	6,52
	3150	1460	960	4330	2200	2600	4,75	1,07	1,60	8,13
L-17/325	1500	1420	1130	3300	3400	3900	3,55	1,28	1,65	7,497
	2000	1420	1130	3800	3600	4150	4,05	1,28	1,65	8,553
	2500	1420	1130	4300	3800	4500	4,55	1,28	1,65	9,609
	3000	1420	1130	4800	4200	5000	5,05	1,28	1,65	10,665
L-18/400	1500	1495	1200	3300	3800	4300	3,55	1,32	1,71	8,010
	2000	1495	1200	3800	4000	4550	4,05	1,32	1,71	9,14
	2500	1495	1200	4300	4200	4900	4,55	1,32	1,71	10,27
	3000	1495	1200	4800	4600	5400	5,05	1,32	1,71	11,392



Mod. L-1/165




BREVES ESPECIFICACIONES

BRIEF SPECIFICATIONS

MOD.	L-1/165	L-1/180	L-8/165	L-8/180	L-1/200	L-1/225
Altura de puntos Centre height Hauteur de pointe Spitzenhöhe	165	180	165	180	200	225
Distancia entre puntos Centre distance Distance entre pointes Spitzenweite	750-1000	750-1000	750-1000	750-1000	750-1150	750-1150 1650
Diámetro admitido sobre bancada y escote Swing over bed and gap Diamètre admis sur le banc et le rompu Drehdurchmesser über Bett und in Kröpfung	330-480	360-510	330-480	360-510	390-590	440-640
Anchura de bancada Bed width Largeur du banc Bettbreite	250	250	250	250	300	300
Nariz y agujero del husillo principal Main spindle nose and bore Nez et alésage de la broche Hauptspindel-nase und -bohrung	DIN 55022 nº 5 CAMLOCK nº 5 42	DIN 55022 nº 5 CAMLOCK nº 5 42	DIN 55022 nº 5 CAMLOCK nº 5 42	DIN 55022 nº 5 CAMLOCK nº 5 42	DIN 55022 nº 6 CAMLOCK nº 6 42	DIN 55022 nº 6 CAMLOCK nº 6 52
Velocidades husillo en r.p.m. Speed range Vitesses Spindeldrehzahlen	(9) 60-2000	(9) 60-2000	(18) 30-2000	(18) 30-2000	(12) 32-1800	(12) 32-1800
Avances longitudinales Longitudinal feeds Avances longitudinales Längsvorschübe	(20) 0,047-0,86	(20) 0,047-0,86	(20) 0,047-0,86	(20) 0,047-0,86	(48) 0,044-1,04	(48) 0,044-1,04
Avances transversales Cross feeds Avances transversales Quervorschübe	(20) 0,021-0,39	(20) 0,021-0,39	(20) 0,021-0,39	(20) 0,021-0,39	(48) 0,018-0,44	(48) 0,018-0,44
Pasos métricos Metric threads Pas métriques Metrische Gewinde	(20) 0,5-9	(20) 0,5-9	(20) 0,5-9	(20) 0,5-9	(36) 0,21-12	(36) 0,21-12
Pasos Whitworth en h/1" Whitworth threads in t.p.i. Pas Whitworth en f.p.p. Whitworth-Gewinde in GG/1"	(16) 56-4	(16) 56-4	(16) 56-4	(16) 56-4	(36) 96 - 1 1/8	(36) 96 - 1 1/8
Pasos modulares Modular threads Pas module Modulgewinde	(20) 0,25-4,5	(20) 0,25-4,5	(20) 0,25-4,5	(20) 0,25-4,5	(24) 0,075-4	(24) 0,075-4
Potencia motor principal en CV Main motor power HP Puissance du moteur principal CV Leistung des Hauptmotors PS	3	4	2/3,8	2/3,8	5,5	5,5

DE NUESTRO PROGRAMA DE FABRICACION PIDANOS EL FOLLETO QUE SEA DE SU INTERES.

AMONG OUR PRODUCTION PROGRAMME, PLEASE ASK FOR THE CATALOGUE ON THE MACHINE OF YOUR INTEREST.

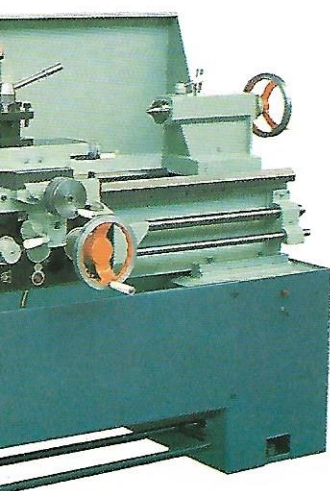

Mod. L-1/200



Mod. L-3/155

BREFS DETAILS TECHNIQUES ● KURZE TECHNISCHE DATEN

L-1/260	L-1/310	L-2/105	L-3/155	L-8/225	L-8/260	L-11/260	L-17	L-18
260	310	250	285	225	260	260	325	400
150-1625 2225-3150	1150-1625 2225-3150	1150-1625	1150-1625 2225-3150	750-1150 1650	1150-1625 2225-3150	1150-1625 2225-3150	1500-2000 2500-3000	1500-2000 2500-3000
530-770	630-870	490-690	580-820	440-640	530-770	530-770	675-900	815-1050
350	350	300	350	300	350	350	475	475
DIN 55022 n° 6 CAMLOCK n° 6 68	DIN 55022 n° 8 CAMLOCK n° 8 78	ASAB 5,9 n° 8 105	ASAB 5,9 n° 11 155	DIN 55022 n° 6 CAMLOCK n° 6 52	DIN 55022 n° 6 CAMLOCK n° 6 68	DIN 55022 n° 8 72	CAMLOCK n° 8 92	CAMLOCK n° 8 102
(12) 23-1250	(12) 21-1100	(12) 25-1200	(12) 17-875	(12) 38-2200	(12) 25-1400	(12) 30-1800	(16) 17-1000	(15) 11-1000
(48) 0,044-1,04	(48) 0,044-1,04	(48) 0,044-1,04	(48) 0,044-1,04	(44) 0,05-0,75	(55) 0,05-1,5	(55) 0,05-1,5	(66) 0,05-3	(66) 0,05-3
(48) 0,018-0,44	(48) 0,018-0,44	(48) 0,018-0,44	(48) 0,018-0,44	(44) 0,025-0,375	(55) 0,025-0,75	(55) 0,025-0,75	(66) 0,025-1,5	(66) 0,025-1,5
(36) 0,21-12	(36) 0,21-12	(36) 0,437-24	(36) 0,437-24	(44) 0,5-7,5	(55) 0,5-15	(55) 0,5-15	(66) 0,5-30	(66) 0,5-30
(36) 96-11/8	(36) 96-11/8	(36) 48-9/16	(36) 48-9/16	(44) 60-4	(55) 60-2	(55) 60-2	(66) 60-1	(66) 60-1
(24) 0,075-4	(24) 0,075-4	(24) 0,15-8	(24) 0,15-8	(44) 0,25-3,75	(55) 0,25-7,5	(55) 0,25-7,5	(66) 0,25-15	(66) 0,25-15
7,5	7,5	5,5	7,5	7,5	10	12	20	20

PARMI NOTRE PROGRAMME DE FABRICATION, DEMANDEZ LE CATALOGUE DE LA MACHINE DE VOTRE INTEREST.
BITTE VERLANGEN SIE DEN PROSPEKT DER SIE INTERESSIERENDEN MASCHINE AUS UNSEREM HERSTELLUNGSPROGRAMM.